




ABREX[®]-A

Specifications

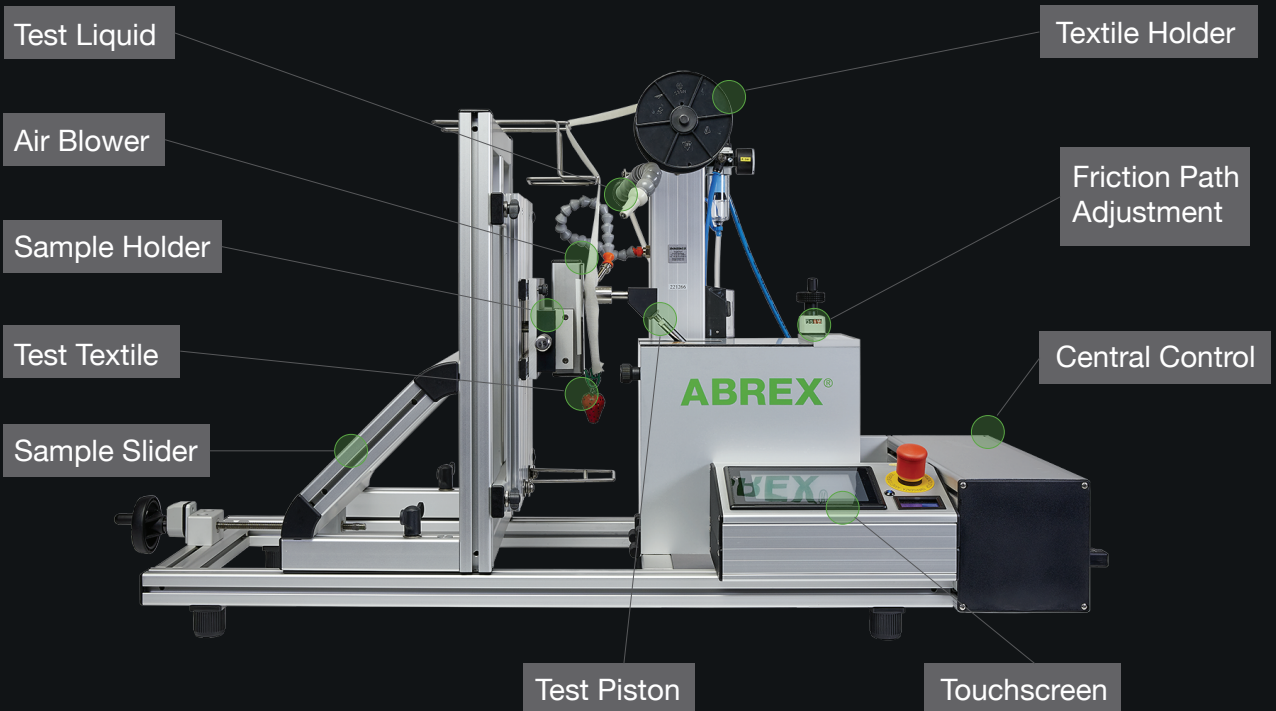

Technical Data

Load: 1-20N
Speed: 60mm/s
Friction path: 4 – 40mm
A mode: 20mm/2Hz/5N
Liquid supply: cyclic & manual
Fabric supply: cyclic & manual
Number of cycles: 1 -100 million
Electricity: 230 V/50 Hz CE-conform or 110V/60 Hz
Net weight: 50kg
Dimension: W 130, H 80, D 60 cm